


Pairing a remote control to a Clock (ZA, ZB series) -

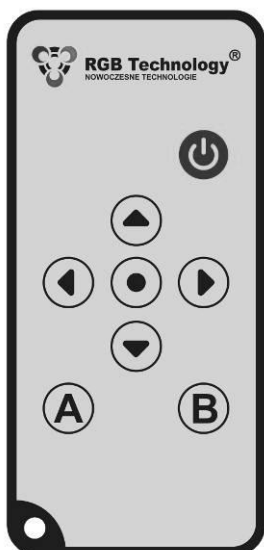

To add a remote control to the clock:

- plug in power to the clock (if it was already plugged in, unplug for min 10 seconds);
- point the remote control towards the clock display, and enter the following sequence of buttons (max 1 second between presses):

A, B, ▼, A, ▼, ▼, B;

- the word "SAVE" should appear for a moment on the clock display
- if the remote is already paired with this clock, "dub". will appear

NOTE! Key sequence should be entered within 60 seconds of plugging in.